



To start programming session:

Feature ** 266344


At password:266344

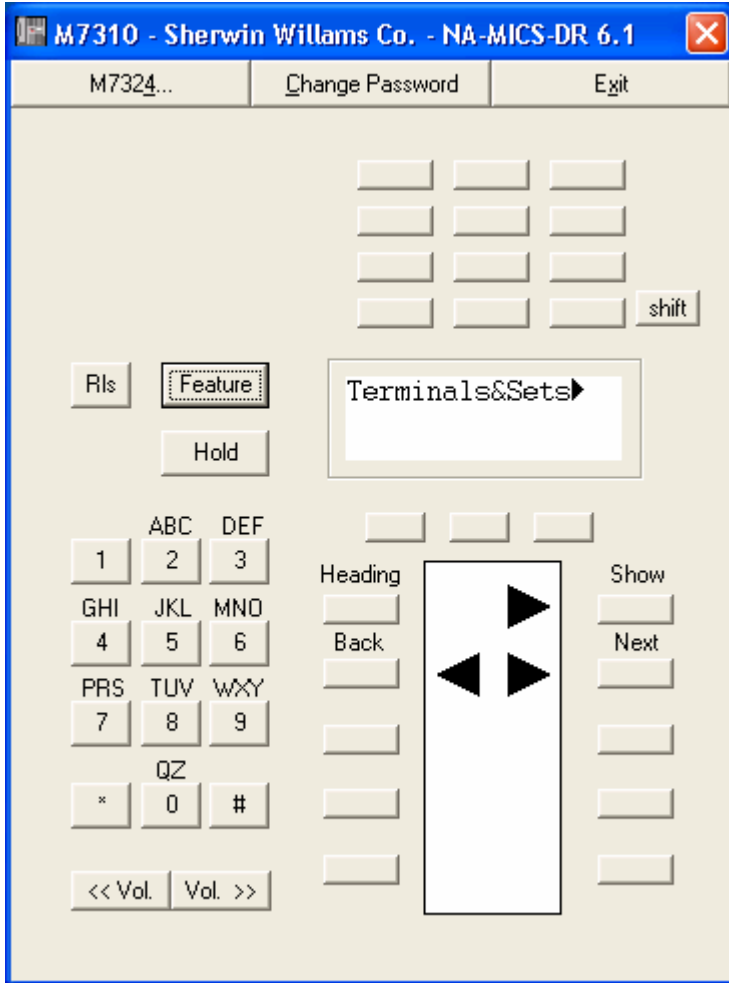


At **Terminals&Sets** press next key six times to **System prgrming**

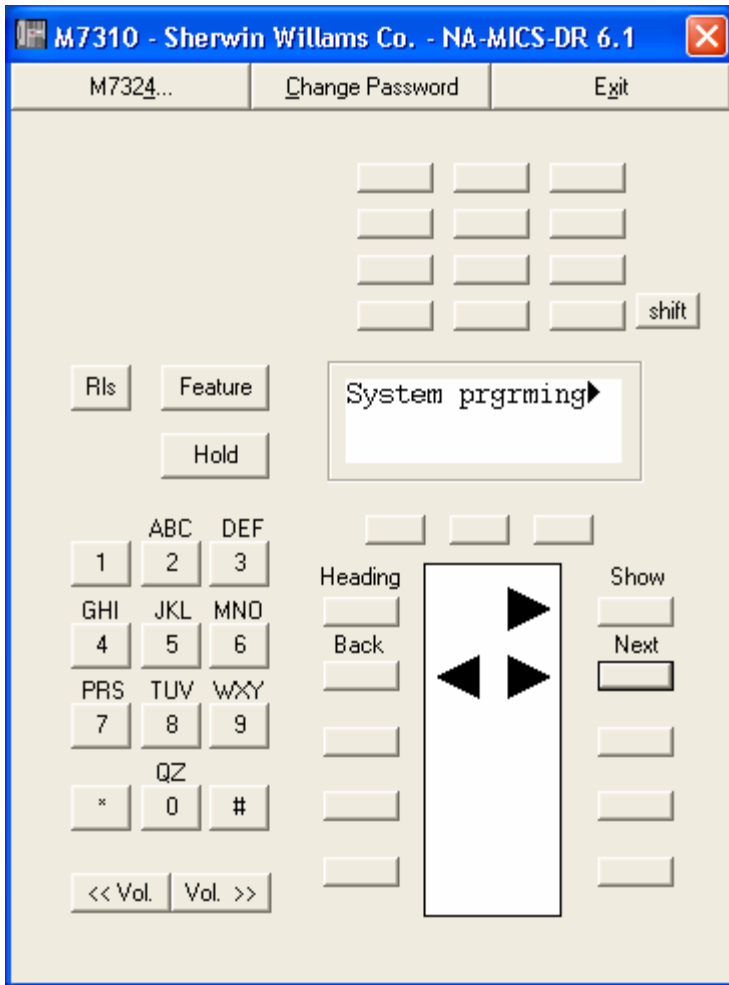


At **System prgrming** press show key one time to **Hunt groups**

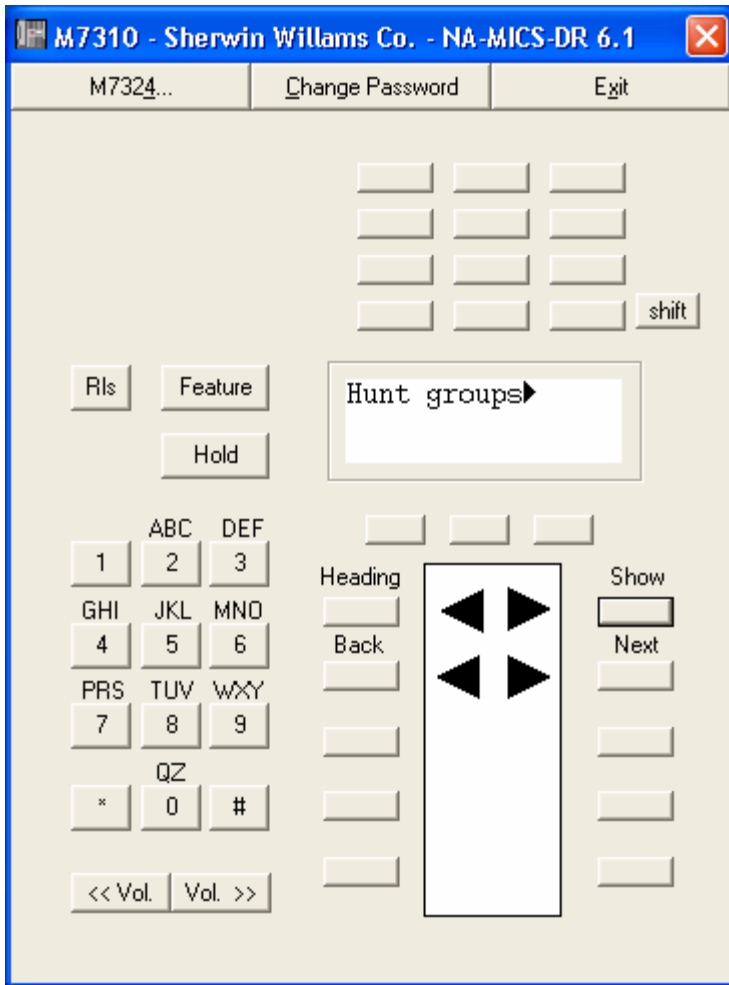


At **Hunt groups** press next key two times to **Featr settings**

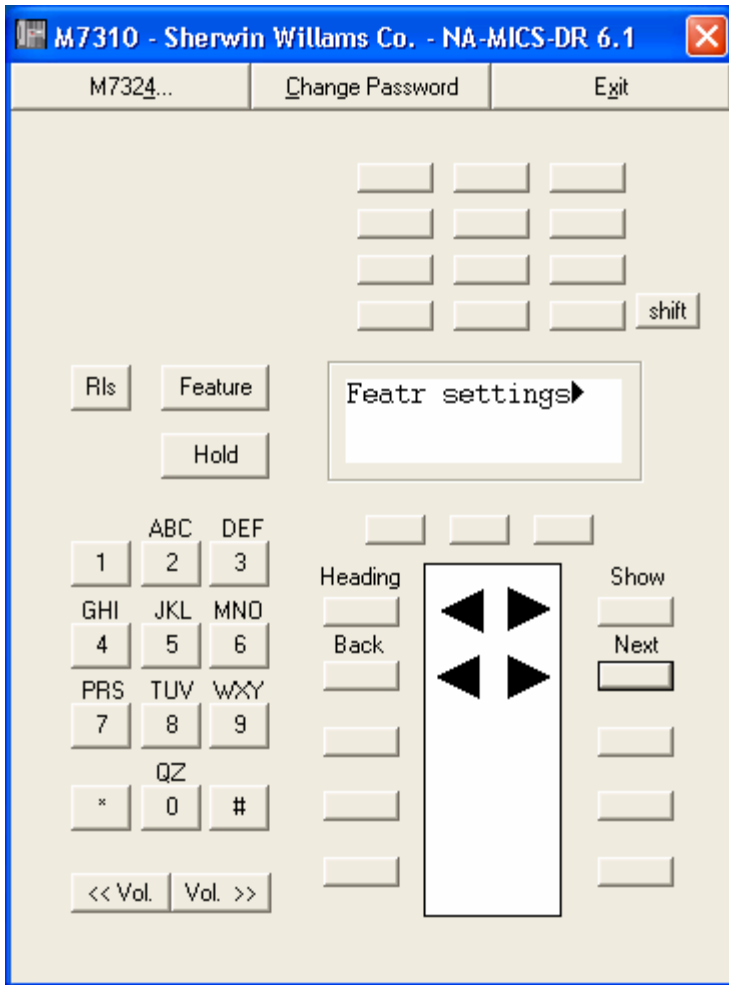

At **Featr settings** press show key one time to **Backgrnd music**

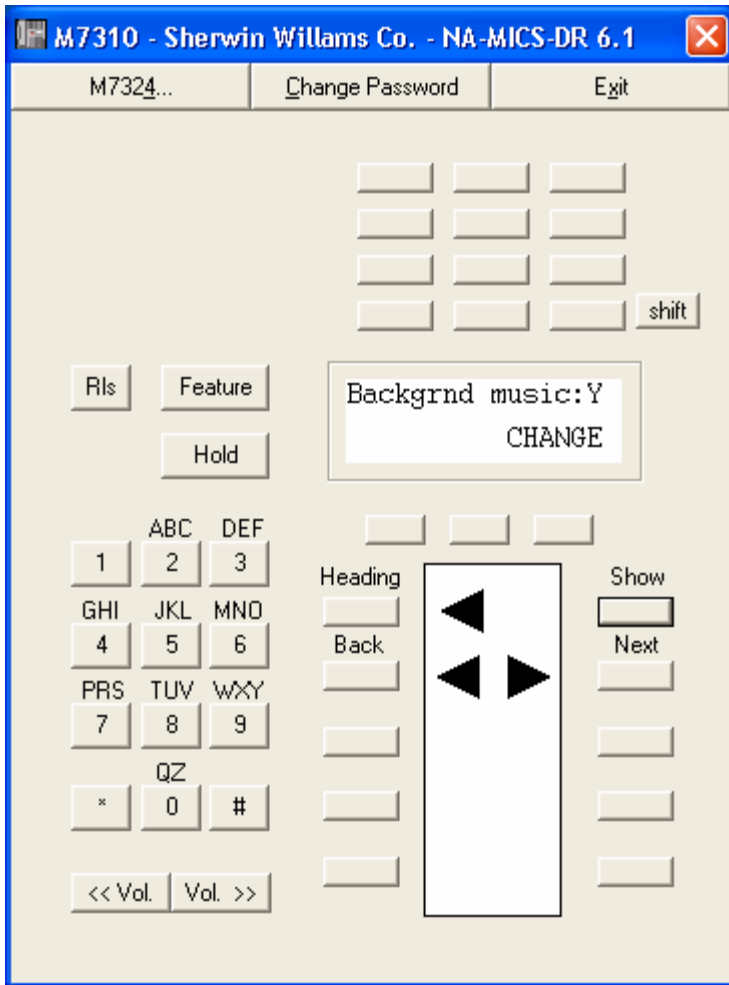

At **Backgrnd music** press next key thirteen times to **Daylight time**

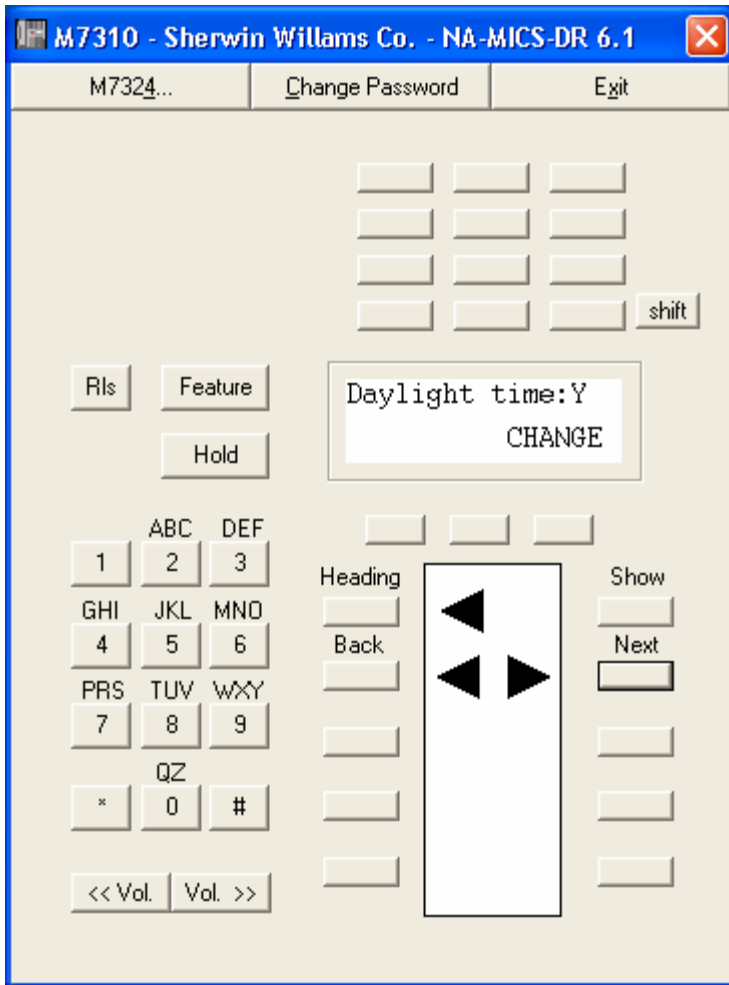

At **Daylight time** if N change to Y with the right soft key
 After you have Y at daylight time to end programming
 Session press the RLS key you will see end of session
 And the time and date will be back in display